

CR-CAT5202/04B


Full digital twisted pair conference discussion unit



Twisted pair conference discussion chairman unit
CR-CAT5202B



Twisted pair conference discussion delegate unit
CR-CAT5204B

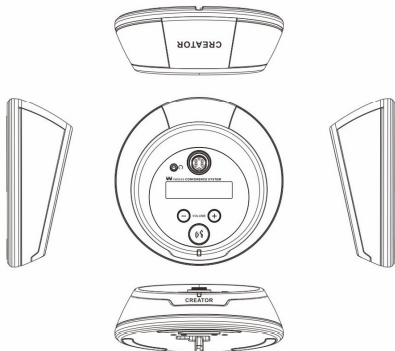

Size(mm):
φ=165, H=64

Product overview

The CR-CAT5202/4B twisted pair conference unit adopts special design to ensure the machine is stable and durable. It is easy to integrate with any meeting room.

The CR-CAT5202/4B is a fully digital conference system unit which supports the twisted pair to be daisy chain connected.

Features

- Heart-shaped directivity capacitance pickup has double color indicating light. Speaking as red, applying as green.
- With loudspeaker, earphone jack and a volume adjusting buttons.
- With howling suppression function, when microphone is turned on, the native speaker automatically shut down.
- Equipped with a backlit LCD screen, which can display microphone on/off status, ID settings, and other information;
- Chairman unit has priority function to full control meeting order. Connection position of chairman unit is not restricted.
- Support non compressed audio transmission technology, the sampling rate of 48K, 20Hz-20KHZ bandwidth perfect sound.
- Support a variety of conference modes like FIFO, APPLY, NORMAL.
- Support the sign function.
- Adopting dual network interface handle connection.
- Adopting professional conference microphones with nut knob connectors for easy insertion and removal.

Specifications

The parameter name	CR-CAT5202/04B
Maximum power consumption	2.6W
Bottom	Basement for pluggable microphone
Earphone jack	3.5mm (0.14 inches)Stereo headphone jack
Connection interface	RJ45
Power of loud speaker	2W
Earphone impedance	>32Ohm<1kOhm
Cartridge type	Capacitive heart type single direction
Sensitivity	-46dBV/pa
Frequency response	20Hz-20KHz
Input impedance	2.2K
Signal-to-noise ratio	>80dB
Color	Black and silvery

System connection diagram

